

Opt-Max SN/CF 0W-40

FULLY SYNTHETIC ENGINE OIL

Opt-Max SN/CF 0W-40 features high performance additive technology in fully synthetic base oil designed to lubricate and protect a wide range of high-performance engines for better responsiveness and performance.



Product Description

Opt-Max SN/CF 0W-40 is a premium quality synthetic engine oil which offer exceptional overall engine cleanliness and protection against wear at high temperature and under severe operating conditions. These products are designed with outstanding thermal stability, improved viscosity temperature characteristics and excellent low temperature fluidity.

Features and Benefits

- Excellent resistance to oil degradation to maintain protection throughout the oil-change interval
- Provides excellent film resistance at high temperature and offers low oil consumption.
- Excellent sludge and varnish deposit control.
- Excellent low temperature features for rapid engine start-up
- Provides long-term oxidation stability.
- Reduce maintenance costs by maximising oil drain and engine overhaul periods.


Applications

- Suitable for many types of modern vehicles equipped with blow-by gas recirculation and catalytic converters operating in extreme driving conditions
- Suitable for latest engine technologies such as Turbo-chargers and Hybrids
- Suitable for high-rev engine designs that require API SN/CF performance oil

Performance Standards

Opt-Max SN/CF 0W-40 meet the following performance requirements:

- API SN/CF
- ACEA A3/B3/B4

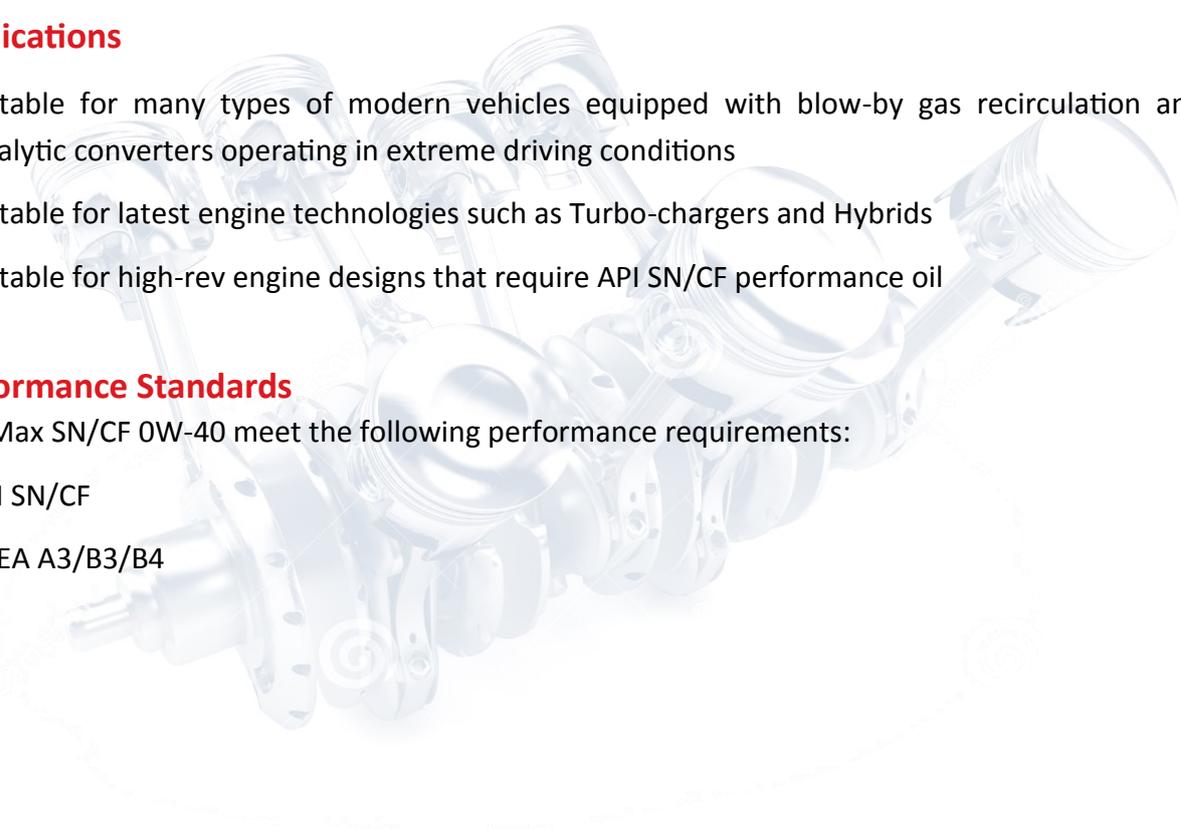

Specifications

Product Properties		Opt-Max SN/CF 0W-40	Testing Methods
SAE Grade	-	0W-40	-
Kinematic Viscosity (40°C)	mm ² /s	79.9	ASTM D445
Kinematic Viscosity (100°C)	mm ² /s	13.9	ASTM D445
Viscosity Index	-	180	ASTM D2270
Density at 15°C	kg/L	0.864	ASTM D4052
Flash Point (open)	°C	235	ASTM D92
Pour Point	°C	-54	ASTM D97

* Above product properties are indicative and subject to change without prior notice

Storage and Handling

- All storage equipment, tanks, pipes, valves and etc. apparatus have to be cleaned thoroughly and inspected to be clean for use before transferring or transporting Opt-Max SN/CF 0W-40.
- Opt-Max SN/CF 0W-40 must be stored in dedicated storage tanks/equipment and it is recommended to be stored in an indoor controlled environment.
- Storage tanks/equipment must be waterproof, mist-proof and free from other mechanical particles.
- Opt-Max SN/CF 0W-40 must be clearly labelled properly during the entire transportation process to prevent the risk of mixing with other petrol-chemical product.

Health & Safety

Opt-Max SN/CF 0W-40 is unlikely to present any significant health or safety hazard when properly used in the recommended application. These products must always be handled with care, particularly avoiding skin contact. For further guidance on Product Health & Safety refer to the appropriate Opt-Max SN/CF 0W-40 Material Safety Data Sheet.